


Cellular-polyethylene insulated jelly filled armoured twin cable with copper conductors made up into units, for use in the local distribution network.

CW 1128-1198 CABLES

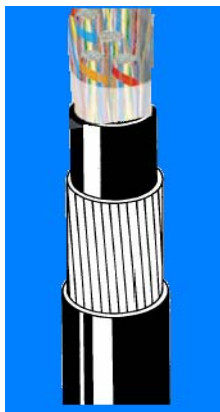

- Solid plain copper conductors, 0.4 / 0.5 / 0.6 / 0.63 / 0.9
- Foam PE insulation
- Insulated conductors twisted into pairs
- 10 pairs laid up in units
- Cable core filled with jelly and covered with PET tape
- Inner sheath: Black PE (see table 1)
- Steel wire Armour
- Over sheath: Black PE (or PVC is available as per purchase order)

Identification

The colours of the insulated conductors:

Cabling Element No.	a-wire	b-wire
1	WHITE	BLUE
2	WHITE	ORANGE
3	WHITE	GREEN
4	WHITE	BROWN
5	WHITE	GREY
6	RED	BLUE
7	RED	ORANGE
8	RED	GREEN
9	RED	BROWN
10	RED	GREY

The colours of sub-unit and unit identification tape lappings:

Unit No	1	2	3	4	5	6	7	8	9	10
Colour	BLUE	ORANGE	GREEN	BROWN	GREY	WHITE	RED	BLACK	YELLOW	VIOLET

Customer- Project	Type of Document	Doc. No.
	Technical Specification	2006-349-TS-01

Date.	Rev.	Page
Dec. 2006	0	1/3

Cellular-polyethylene insulated jelly
filled armoured twin cable with copper conductors made up
into units, for use in the local distribution network.

Electrical Characteristics:

	Conductor diameter				
	0,4	0,5	0,6	0,63	0,9
Max. Conductor resistance(at 20°C) (ohms/km), Max. Average 99% of all values	143	91	63	58	28
	150	96	67	60	30
Min. Insulation resistance (at 20°C)	1500 MΩ x km				
Effective Capacitance (nF/km) Max. Average 99% of all values	56	56	42	56	59
	64	64	46	64	65
Capacitance unbalance Two pair cable All other sizes	800 pF/500 m 275 pF/500 m				
Temperature range: during installation during operation	0°C to +50°C up to +70°C				
Min. bending radius	15 x outer diameter				

Details:

Table1.

Cable size	No. And pair size of units in centre and layers											
			0.4		0.5		0.6		0.63		0.9	
			Conductors		Conductors		Conductors		Conductors		Conductors	
	Centre	1 st	Thick ness	Dia mete r	Thick ness	Dia mete r	Thick ness	Dia mete r	Thick ness	Dia mete r	Thick ness	Dia meter
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
2 Pr	1x2		-	-	-	-	1.1	8.5	1.1	8.0	1.1	9.0
5 Pr	1x5		-	-	1.1	8.0	1.2	11.0	1.1	9.5	1.2	11.5
10 Pr	1x10		1.1	8.5	1.1	9.5	1.2	13.0	1.2	11.5	1.2	14.0
	4x5											
20 Pr			1.1	10.0	1.2	12.0	1.3	16.0	1.2	14.0	1.3	18.0
	2x10											
30 Pr	3x10		1.1	11.7	1.2	13.7	1.4	21.0	1.3	16.8	1.4	21.7
	5x10											
50 Pr			1.2	14.0	1.3	16.5	1.4	24.0	1.4	20.5	1.5	26.5
	1x10	4x10										
	2x10	8x10										
100 Pr	3x10	7x10	1.3	18.5	1.4	22.0	1.6	32.0	1.5	27.5	1.7	36.0
	4x5	8x10										
150 Pr	3x50		1.4	22.2	1.5	26.2	1.7	40.6	1.6	32.6	1.8	42.3
200 Pr	4x50		1.4	25.1	1.5	29.7	1.8	46.5	1.7	37.3	1.9	48.5
300 Pr	6x50		1.4	30	1.6	36,0	-	-	-	-	2.0	59,5

Note: 1) The diameters are maximum specified diameters under the armor
2) The thicknesses are minimum average wall thicknesses

Customer- Project	Type of Document	Doc. No.
	Technical Specification	2006-349-TS-01

Date.	Rev.	Page
Dec. 2006	0	2/3



Cellular-polyethylene insulated jelly filled armoured twin cable with copper conductors made up into units, for use in the local distribution network.

1	2	3	4
Specified diameters (maximum)		Nom. Diameter of armour wire	Min. avg. Thickness of oversheath
Inclusive range			
mm			
-	12	0.9	0.9
12.1	15	1.25	0.9
15.1	20	2.0	1.0
20.1	25	2.0	1.1
25.1	30	2.0	1.2
30.1	35	2.0	1.3
35.1	40	2.0	1.4
40.1	45	2.5	1.5
45.1	50	2.5	1.6
50.1	55	2.5	1.7
55.1	60	2.5	1.8
60.1	65	3.15	1.9
65.1	70	3.15	2.0
70.1	-	3.15	2.1

Customer- Project	Type of Document	Doc. No.
	Technical Specification	2006-349-TS-01

Date.	Rev.	Page
Dec. 2006	0	3/3